

### DESIGN

Body	Flangeless wafer type with Centring Lugs and Long Neck for insulating
End Connection	EN 1092 PN 10/16
Face to Face	EN558-1/2 Series 20 API 609 Cat. A
Body Seat	Non replaceable Lining bonded to the body
Shaft Seal Design	O-ring bush
Driving Shaft	With indication for position of the disc
Special Design Options	-

### TESTING PROCEDURES

Shell strength test	EN 12266-1, P10 ISO 5208 API 598
Shell tightness test	EN 12266-1, P11 ISO 5208 API 598
Seat tightness test	EN 12266-1, P12, Rate A ISO 5208, Rate A API 598
Operability test	EN 12266-2, F20 ISO 5208 API 598



### OPTIONS

Anti-Static Design	In accordance with EN 736/3 and API 609
--------------------	---

### FUNCTIONAL CHARACTERISTICS

Application	On/off, regulating, control valve
Design pressure PS	Maximum 16 bar
Design temp. TS	-20°C (-4°F) to +200° (392°F)
Flow velocity	Max. 5 m/s for liquids, max. 50 m/s for gases
Seat tightness rate	Bi-directional - ISO 5208 rate A


### MARKING & CERTIFICATION

Marking	EN 19, MSS SP 25
Certification	EN 10204 - 2.2, 3.1, 3.2


### PRODUCT DATA

General Description	BUTTERFLY VALVE - Centric rubber lined
Design Code	EN 593
Size Range	DN 50 - 200, NPS 2" - 8"
Maximum Pressure	16 bar

### PREFERRED POSITION WHEN INSTALLED IN HORIZONTAL PIPELINE




**PARTS LIST - EVBLS 50-200 (2"-8")**

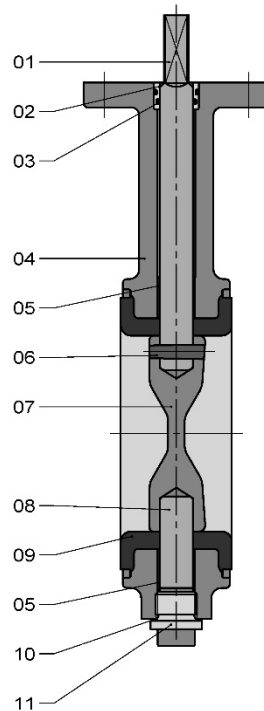

Item	Description	Material <sup>(1)</sup>	EN/DIN	Comparable ASTM
01	Shaft	Duplex SS Martensitic SS Aluminium Bronze Monel K500* Hastelloy-C*	1.4462, EN 10088 1.4057, EN 10088 CuAl10Ni5Fe4, EN/DIN 17665 NA 18, BS 3076 -	A 182, Grade F51 A 276, Grade 431 B 150, C63000 - B 547, N10276
02	Bush	Bronze	-	-
03	O-ring	EPDM NBR FPM	-	-
04	Body	Cast Iron Ductile Iron Ductile Iron (low temp.)	JL 1040, EN 1561 JS 1030, EN 1563 JS 1049, EN 1563	A 126, Class B A 395, 60-40-18 -
05	Bearing	St. / PTFE Lining Bronze / PTFE Lining	-	-
06	Conical pin	See ITEM 01	See ITEM 01	See ITEM 01
07	Disc	Duplex SS Martensitic SS Aluminium Bronze Hastelloy-C* CuNi	1.4462, EN 10088 1.4057, EN 10088 G-CuAl10Ni, DIN 1714 - 2.0835, DIN 17658	A 182, Grade F51 A 276, Grade 431 B 148, C95800 A 494, CW-12MW -
08	Shaft	See ITEM 01	See ITEM 01	See ITEM 01
09	Lining	EPDM NBR FPM	-	-
10	Sealing ring	Cu	-	-
11	Plug	St./Zn5C	-	-

<sup>(1)</sup> Other materials on request

**DIMENSIONS - EVBLS 50-200 (2"-8")**

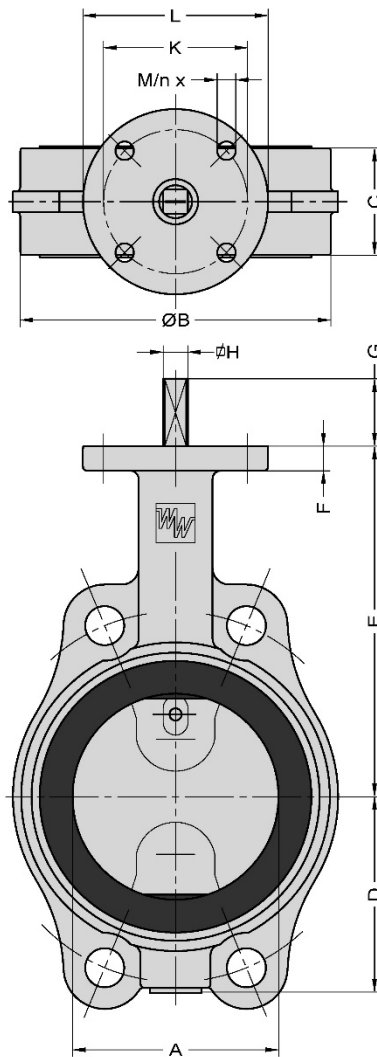

DN	NPS	A	B	C	D	E	F	G	H	ISO 5211	K	L	M	n	MASS ±kg
50	2"	50	100	43	63	152	12	34	10	F07	70	90	9	4	3.1
65	2½"	65	115	46	71	160	12	34	10	F07	70	90	9	4	3.9
80	3"	80	130	46	78	167	12	34	10	F07	70	90	9	4	4.2
100	4"	100	150	52	98	189	12	34	12	F07	70	90	9	4	5.5
125	5"	125	182	56	109	202	12	34	12	F07	70	90	9	4	7
150	6"	150	210	56	133	224	14	34	16	F07	70	90	9	4	10
200	8"	200	262	60	158	248	14	34	16	F07	70	90	9	4	14